

ALGERIA - Jijel and Biskra CCPPs Projects (Hyundai) - 2016-2019 -



Supply of insulated steel panels, metal accessories for the power plant shell :

PANELS


Pre-insulated metal panels with mineral fiber insulation for walls EI120 100mm and 50mm
Pre-insulated metal panels with mineral fiber insulation for walls REI90 100mm
Metal Works for roof finishing and gutter system in galvanized steel 20/10 and in prepainted steel 8/11
RAL 5010/9001

ACCESSORIES

stainless steel screw, rivets, espansolene, end cap for roof panels, silicone tubes

DOWNSPOUTS SYSTEMS

Pipes and accessories (collars, screws, elbows etc)

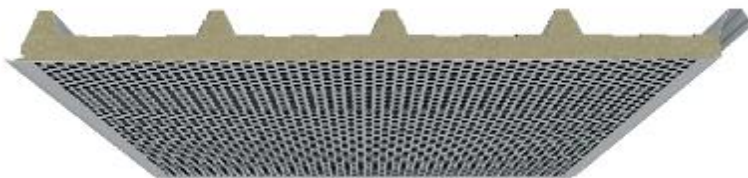


Acoustic roof panels with rock wool insulation and internal micro sheet



Acoustic wall panels with rock wool insulation with visible joint and internal micro locked sheet

VISTA LATO ESTERNO
(External view)

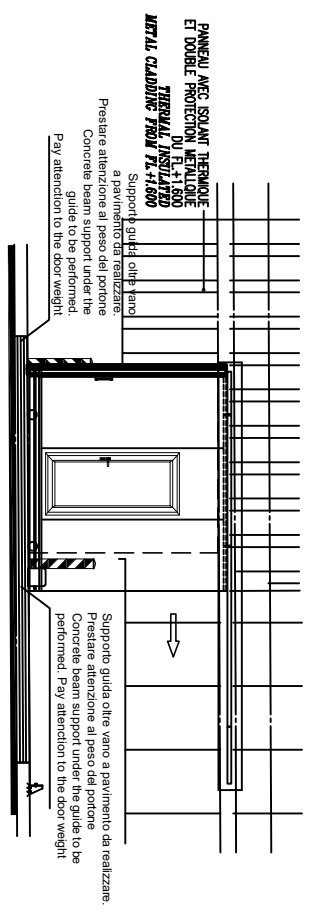

INTERNO
(Interior)

Distanza asse-asse
(Distance between
axis and wall)


Ingombro Anta (Width of the leaf) 3460 mm

Ingombro portone (Door
encumbrance) 3410 mm





ESTERNO
(Exterior)

INTERNO
(Interior)

ESTERNO
(Exterior)

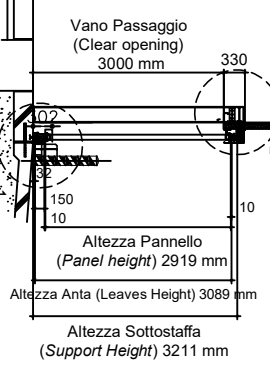

FAVORSIMILE

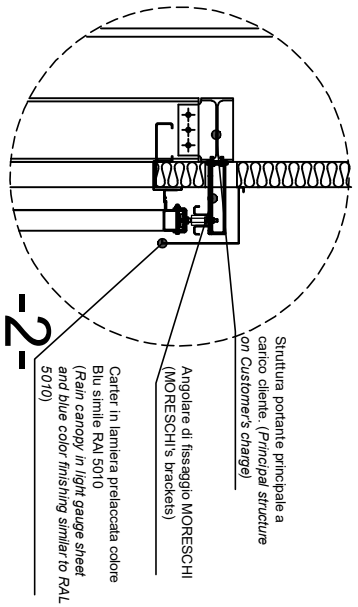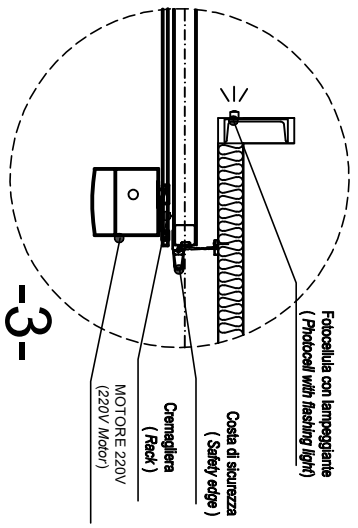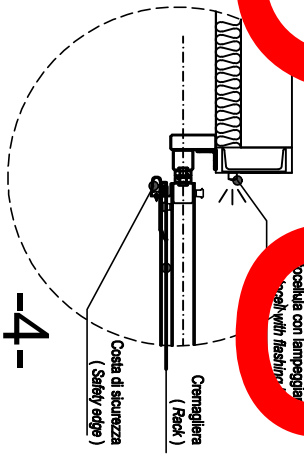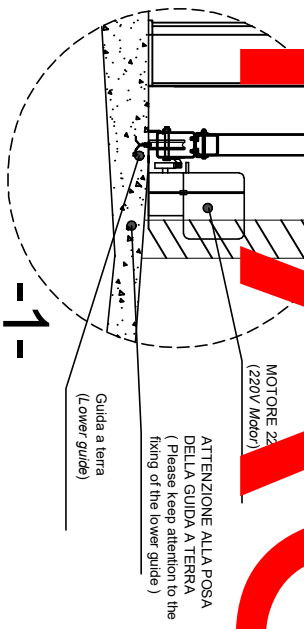

ACCESSORI (ACCESSORIES)

- * N.02 Sliding door with n.01 82mm-thick acting leaves with lower guide).
- * Panels pre-lacquered light gauge sheets and blue paint coat finishing similar to RAL 5010 INTERIOR/ EXTERIOR)
- * Rain canopy in pre-lacquered light gauge sheets and blue paint coat finishing similar to RAL 5010)
- (N.02 Automation including: 1xMOTOR 220V with Control Panel, 1x Push button, 1xCouple of photoeyes, 1xFlashing lights included, 2xSafety edges. Power supply plant and installation of 10A (0.03A) circuit breaker on Customer's charge)
- * PESO DEL PORTONE ±410Kg
(Weight of the door 410Kg).



Sliding doors, made with panels coated with sheets of galvanized sheet steel and pre-lacquered in a color similar to RAL 5010. Panel thickness 82mm. Upper cover in galvanized sheet steel, pre-painted in similar color 5010.
Indoor installation. Goods delivered with user and handling manual and CE marking

